


# Solius Radiant Panel Heater

EXTENSIVE HEAT PANEL WITH WEEKLY PROGRAMMING AND HOMOGENEOUS HEAT SPREAD

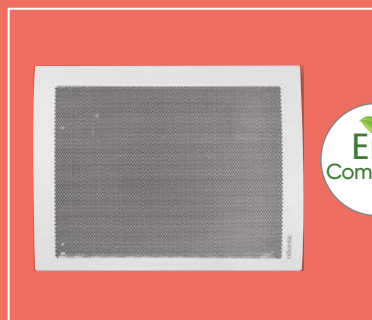

## + PRODUCT

### COMFORT

- Instantaneous feeling of warmth & homogeneous heat spread
- Easy prog: 24h/7, program your device according to your life rhythm for greater comfort & savings
- Extensive heat panel with black painted extruded aluminium heating element with wide heating surface
- Ultimate safety due to Class II, IP 24 protection and dual electric insulation
- Anti-tilt system and automatic overheating safety device

### SAVINGS

- High-precision electronic thermostat
- Up to 25% energy savings\*
- ErP-compliant

### USER-FRIENDLINESS

- Ergonomic LCD digital controls
- 2 modes: Manual/Prog
- ASP (Anti-Staining Process) to reduce staining on wall and on equipment
- Easy to install: H-shaped vertical support
- Model with standing kit and plug

### DESIGN

- Slim space-saving design for better integration into your home
- Colour: White (RAL 9016)
- Back plate colour: Anthracite (RAL 7021)

## EXTENSIVE HEAT PANEL


1000 TO 2000 W



Model available\*\*



Energy savings



LCD digital controls



Technology



Heating element type


\*Compared with a mechanical convector

\*\*This model is A: Horizontal mounting position (or mobile with optional standing kit)

# Solius



- 1 LCD digital controls
- 2 Perforated frontal air outlet
- 3 Extruded aluminium heating element
- 4 Room temperature sensor
- 5 Anti-tilt system
- 6 Overheating safety device





- 1 Room & set temperature and active mode display (2 modes: Manual/Prog)
- 2 Navigation buttons
- 3 Access to menu/validation



## EASY PROG

- **Manual mode:** Allows to set up the device at the desired temperature from Off to 30°C.
- **Prog mode:** Allows to set up to 3 periods of Comfort temperature by day (24h) over 7 days. Possibility to copy a daily programme on other days of the week.

## INSTALLATION DIMENSIONS

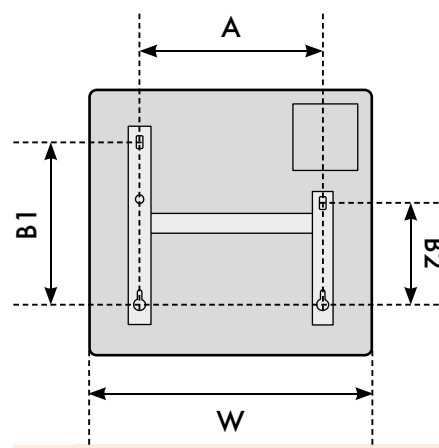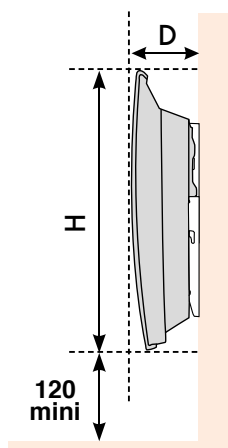

## TECHNICAL DATA

OUTPUT (W)	DIMENSIONS (mm)						NET WEIGHT (Kg)
	WIDTH (W)	HEIGHT (H)	DEPTH (D)	A	B1	B2	
1000	601	477	129	343	256	158	5.8
1500	823	477	129	565	256	158	7.8
2000	1045	477	129	787	256	158	9.2

CE - Classe II - IP 24